



INTER GLOBE

Architectural Ironmongery Solutions...





COMPANY PROFILE

INTER GLOBE I G A General Trading LLC was established in the Year 2005 to cater to the needs of Concrete Pump Industry in United Arab Emirates. Having grown in the years, IGGT has extended its Network to Auto Spareparts Division - Heavy Vehicles. After establishing stronghold in U.A.E., IGGT spread its wings to Nationwide services to Oman and Qatar. Now with total branches of 5 (Sharjah, Dubai, Qatar and Muscat), IGGT is a pioneer in the field of Concrete Pump parts / Auto Spareparts.

With the success in the Industry, IGGT further expanded its operations in the field of Architectural Ironmongery. IGGT – Architectural Ironmongery Division, offers a comprehensive range of Ironmongery Products – Lever Handles, Mortice Cylindrical Lockcases, Door Closers, Ball Bearing Butt Hinges, Panic Hardwares and various other Ironmongery accessories to suite for Commercial / Residential Buildings, Villas, Mixed Use Development Buildings and Door Suppliers.

With extensive Ironmongery experience, IGGT offers a full and professional service to meet any level or type of customer requirement. IGGT also advise its Customers regarding the selection of suitable Ironmongery depends upon the Door type – Fire Rated / Non-Fire Rated and its various types of application.


We are supplying high quality ironmongery materials from world renowned brands IR-Briton (UK), Allegion (UK), ASSA ABLOY (USA), SOSS (USA), ABLOY (Finland), FRASCIO (Italy), I-GLOBE (EU), IKON (Germany), EURO PROTEC (EU), LORRIENT (Australia), KILARGO (Australia).

INTER GLOBE
IGA GENERAL TRADING LLC



انتر جلوب
اي جي ايه للتجارة العامة ش.ذ.م.م



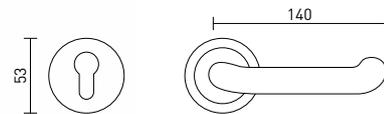


901.010.630

IGLH.901.SS

Lever handle on rose with euro profile cylindrical escutcheon

Available Size: 19mm Dia, 22mm Dia

Finish: SSS, PSS

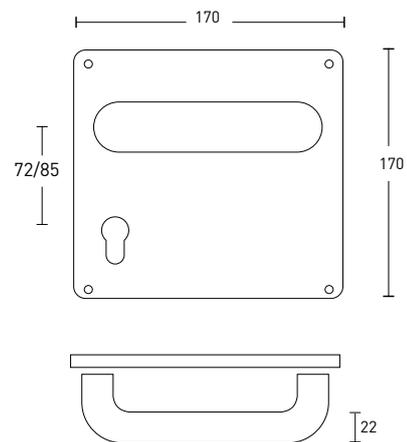

902.100.630

Lever handle on square plate

Available Size: Handle 22mm Dia, Square plate 170x170x1.5mm, c/c 72mm or 85mm

Finish: SSS, PSS




i-GLOBE

Tubular Lever Handle Series



903.006.630



904.001.630



905.004.630



906.009.630



Finish: Satin Stainless Steel (SSS)



i-GLOBE

Tubular Lever Handle Series



907.013.630



908.002.630



909.003.630



910.008.630



Finish: Satin Stainless Steel (SSS)




i-GLOBE


Solid Lever Handle Series



801.038.630



802.019.630



803.041.630




804.947.630




Finish: Satin Stainless Steel (SSS)



805.036.630



806.020.630




807.010.630



808.017.630




Finish: Satin Stainless Steel (SSS)

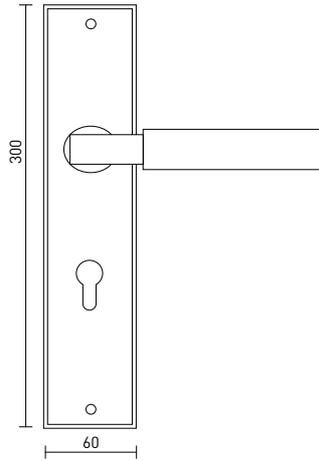

701.900.630

Lever handle on plate

Size: 22x300x60, Finish: SSS, PSS

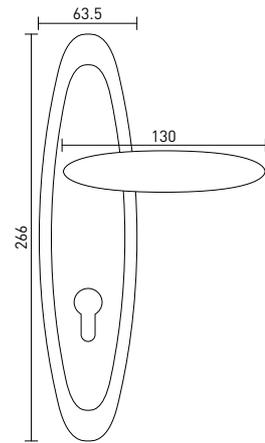

702.265.630

Lever handle on plate

Size: 63.5x266x130, Finish: SSS, PSS



705.901.630

Lever Handle on Rose and Cylindrical Escutcheons

Finish: SSS, PSS




704.109.630

Lever Handle on Rose and

Cylindrical Escutcheons

Finish: SSS, PSS




703.108.630

Lever Handle on Rose and


Cylindrical Escutcheons

Finish: SSS, PSS







601.9293.618




602.9292.618



603.9336.618




604.9229.618



Finish: Satin Nickel / Chrome



605.9611.618




606.9206.618



607.9201.618



608.9288.618



Finish: Satin Nickel / Chrome



110 APOLLO
Lever Handle on Rose & Esc.
Size: 114x52mm
Finish: Satin Chrome



300 LAGUNA
Lever Handle on Rose & Esc.
Size: 135x52mm
Finish: Inox Chrome



401 SOFT PLUS
Lever Handle on Rose & Esc.
Size: 129x52mm
Finish: Polished Brass / Satin Brass

Door Knobs



G28 SNCP
Size: 60mm dia - 86x54mm




G-14 PVD
Size: 74mm dia - 80.5x79mm




SE 100 SS
Size: 50mm dia - 86x54mm



G-22 SN
Size: 60mm dia - 68x79mm

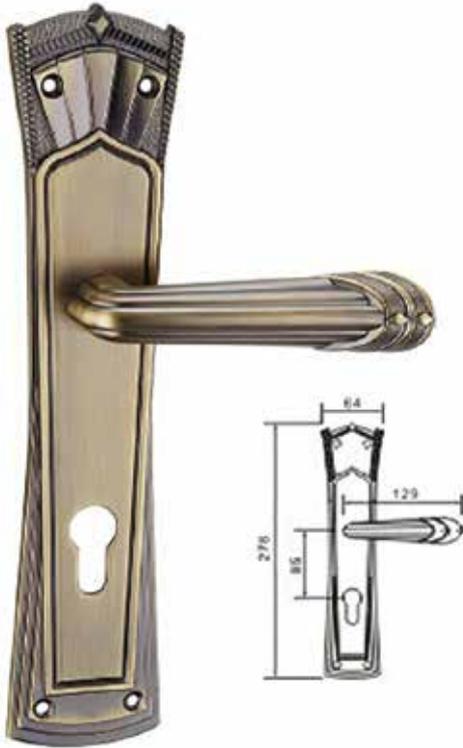

501.9377.9370

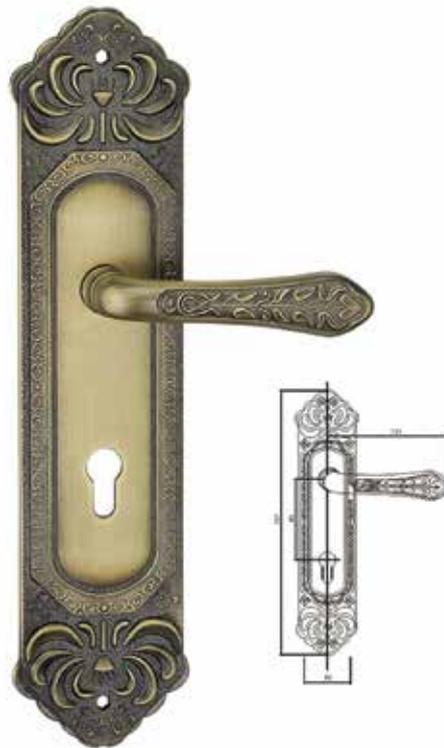

502.9806.9712



503.9209.9302



504.9640.9225

Finish: Antique Brass



EURO PROTEC is the high-end version of locking systems and meets exacting standards regarding Security, versatility and convenience. No locking system is ever the same as any other. EURO PROTEC locking cylinders are always the right choice.

Features:

- Extruded solid brass body. Plug and mushroom anti-pick pins.
- Top pins made of Solid Brass
- Bottom pins of Anti Drill Stainless Steel.
- Two Line bottom pins.
- Springs made from special treated bronze for lasting tension.
- Available with 5 pins and 6 pins
- Self lubricating cam from sintered steel.
- All Cylinders supplied with 3 keys.
- Option of master keying systems
- Complies with DIN 18254 Standard.



EURO PROFILE DOUBLE CYLINDER

860.DP.60.SN	60mm
870.DP.70.SN	70mm
880.DP.80.SN	80mm
890.DP.90.SN	90mm



EURO PROFILE KNOB CYLINDER

860.KP.60.SN	60mm
870.KP.70.SN	70mm
880.KP.80.SN	80mm
890.KP.90.SN	90mm



EURO PROFILE PRIVACY CYLINDER

860.WC.60.SN	60mm
870.WC.70.SN	70mm
880.WC.80.SN	80mm
890.WC.90.SN	90mm

Special sizes 100mm and above - available upon request.



EURO PROFILE SINGLE CYLINDER


845.SC.45.SN	45mm
--------------	------



SINGLE CYLINDER THUMB TURN

845.SK.45.SN	45mm
--------------	------


GRAND MASTER KEY SYSTEM

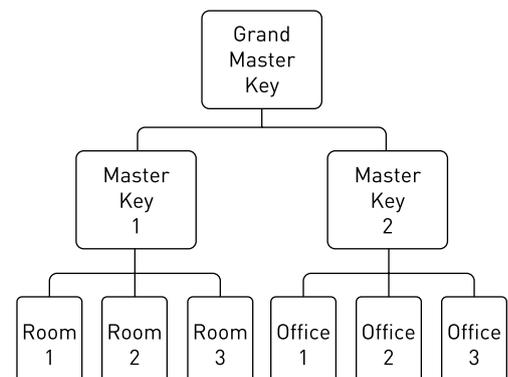



Features:

- Heavy duty spring mechanism
- Double Throw dead bolt extension
- 55 / 60mm backset, 72mm centers
- Easy reversible latch bolt without tampering lock mechanism.
- Cylinder can withdraw both Latch and Dead bolt - offers safety combined with security.
- Dimension according to DIN 18251
- Suitable for Fire Rated Doors
- CE Marked
- Conforms to BS EN 12209

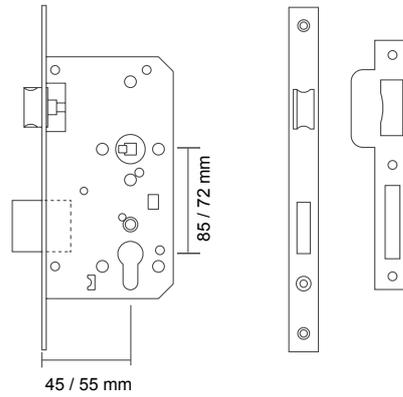

ZDL.7255.SS
Mortice Lockcase, CE Marked,
 CERTIFIRE, Fire Rated
 Size: 55mm BS Finish: SSS


771.5572 Z
IGL.55.PZW
Mortice Lockcase, CE Marked
 Size: 55mm BS Finish: SSS

771.850.045
IGL.45.PZW
Mortice Lockcase, 85mm C/C
 Size: 45mm BS Finish: SSS




Features:

- 55mm Backset, 78mm Centres
- SS 304 forend and strike plate
- SS 304 latch bolt and Dead Bolt
- SS 304 spindle follower
- BS EN 12209 Standard
- Suitable for bathroom or toilet doors
- Lever handle retracts latchbolt. Thumb turn operates deadbolt.

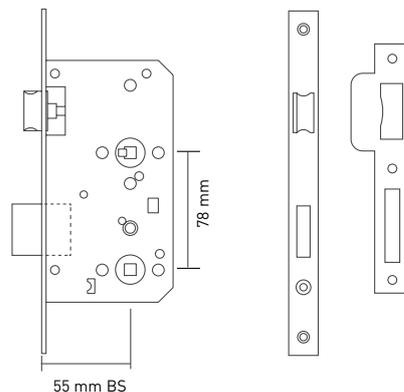

772.5578WC
IGL.55.WC
Mortice Bathroom Lockcase
 Size: 55mm BS Finish: SSS

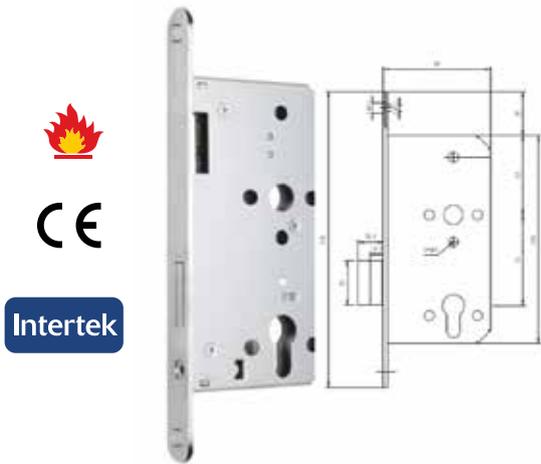


773.8508.630 (5572 ZD)
Mortice Dead Lockcase

- Euro profile cylinder operation
- Backset 55 mm; • Forend 22x138 mm
- Two turn bolt extension
- Cylinder can withdraw Dead bolt - offers safety combined with security
- Successfully included in fire test to BS 476: Part 22 for use on 90 minutes fire door




774.8518.630 (5572 ZL)
Mortice Latch Lockcase

- Balanced spring mechanism, suitable for both sprung and unsprung lever for long life Operation.
- Easy reversible latch
- Backset 55 mm; • Forend 22x138 mm
- Successfully included in fire test to BS 476: Part 22 for use on 90 minutes fire door

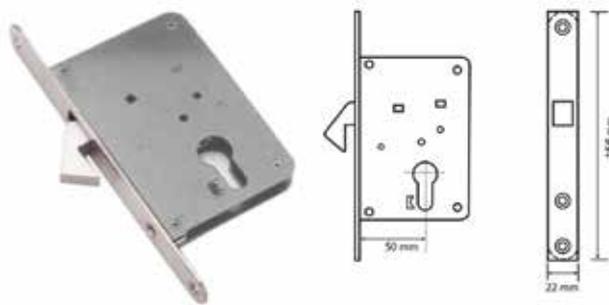


775.852.630
Mortice Hook Lock

- Cylinder operated mortice lock for sliding doors.
- 50 mm Backset
- Solid brass hook
- Forend 22 x 156 mm

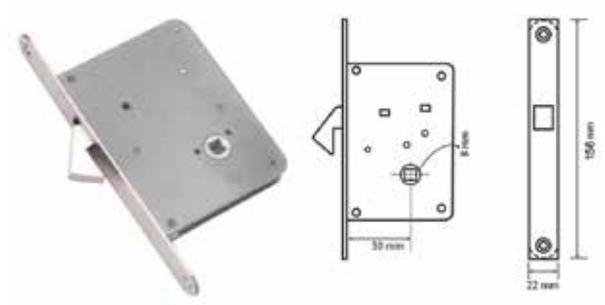

776.853.630
Mortice Hook Lock (WC DOOR)

- Privacy function mortice lock for sliding doors.
- 50 mm Backset
- 8 mm square spindle holes
- Solid brass hook
- Forend 22 x 156 mm

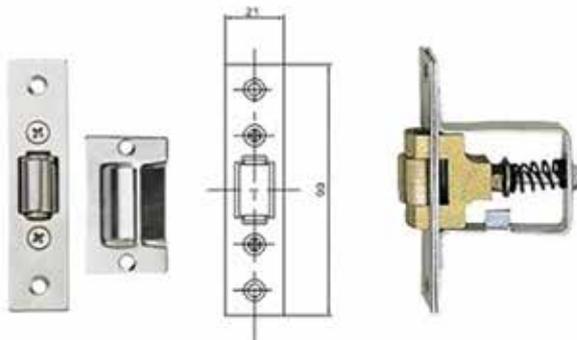

777.201.630
ROLLER LATCH
Size: 54x90
Finish: SSS



778.855.630
BUDGET LOCK
Size: 36mm BS
Finish: SSS



Pull Handle bolt through fixing

440.019.150 19x150mm
 440.019.225 19x225mm
 440.022.225 22x225mm
 440.022.300 22x300mm
 Finish: SSS, PSS



Pull Handle back to back fixing

441.019.150 19x150mm
 441.019.225 19x225mm
 441.022.225 22x225mm
 441.022.300 22x300mm
 Finish: SSS, PSS



Pull Handle on Rose fixing

442.019.225 19x225mm
 442.019.300 19x300mm
 442.022.225 22x225mm
 442.022.300 22x300mm
 Finish: SSS, PSS



T-BAR Pull Handle Back to Back

443.032.800 32 x 800mm
 443.032.100 32 x 1000mm
 443.032.150 32 x 1500mm
 443.032.200 32 x 2000mm
 Finish: SSS, PSS



CRANK PULL HANDLE, Back to Back

444.025.300 25 x 300mm
 444.025.450 25 x 450mm
 443.032.450 32 x 450mm
 444.032.600 32 x 600mm
 Finish: SSS, PSS



SQUARE MITRED Pull Handle Back to Back

445.019.225 19 x 225mm
 445.019.300 19 x 300mm
 445.019.450 19 x 450mm
 445.019.600 19 x 600mm
 Finish: SSS, PSS

Push Plate



446.860.300
Push plate
 300 x 100 x 1.5 mm
446.860.400
 400 x 100 x 1.5 mm
 Finish: SSS, PSS, PB



446.861.001
Push plate engraved PUSH
 300 x 100 x 1.5 mm
 Finish: SSS, PSS, PB



446.870.001
19 mm dia Pull handle on plate
 300 x 100 x 1.5 mm
 Finish: SSS, PSS, PB


Kick Plate Mop Plate




447.600.200 - 600 x 200 x 1.5
 447.700.200 - 700 x 200 x 1.5
 447.800.200 - 800 x 200 x 1.5
 447.900.200 - 900 x 200 x 1.5
 447.100.200 - 1000 x 200 x 1.5
 447.110.200 - 1100 x 200 x 1.5
 Finish: SSS, PSS, PB




301.336.307
Size: 307mm
Finish: SNCP



302.110.300
Size: 300mm
Finish: SNCP



303.144.274
Size: 274mm
Finish: SNCP



304.201.430
Size: 430mm
Finish: DAB, PVD



305.303.425
Size: 425mm
Finish: PVD, AB



306.304.303
Size: 303mm
Finish: PVD, AB



201.3704.630
Door Stopper
Finish: SSS



202.3801.630
Pedestal Door Stopper
Finish: SSS



203.3817.630
Wall Door Stopper on Rose
Finish: SSS



204.3818.630
Wall Door Stopper
Size: 76mm
Finish: SSS



205.3819.630
Coat Hook
Finish: SSS



206.3705.630
Wall Door Stopper / Coat Hook
Finish: SSS



207.3853.630
Door Holder
Finish: SSS



208.3850.626
Magnetic Door Holder
Finish: SN



209.3820.626
Door Viewer
Finish: SN



210.3805.626
Door Chain
Finish: SN



211.3806.626
Door Guard
Finish: SN



212.3825.630
Door Guard - Concealed
Finish: SSS

Other Finishes:

AB (Antique Brass), PSS (Polishes Stainless Steel), PB (Polished Brass), CP (Chrome Plate)



213.0037.630
Lever action flush bolt (Timber Door)
 Size: 19 x 203 mm, 25 x 203 mm
 Finish: Satin Stainless Steel



214.0037.630
Lever action flush bolt (Steel Door)
 Size: 171.5x25 mm 200mm bar
 Finish : Satin Stainless Steel



215.3802.626
Dust Excluding Spring Socket
 Size: 13mm Dia
 Finish : Satin Chrome



216.SW01.630
WC Escutcheon for disabled
 Finish: SSS



217.SW02.630
WC Escutcheon
 Finish: SSS / PSS



218.SW03.630
WC Escutcheon
 Finish: SSS



219.3707.626
Toilet Lock
 Finish: CP



227.5501.630
WC Dead Lock
 Size: 58mm BS
 Finish: SSS



220.0820.630
Escutcheon
 Finish: SSS



221.0821.630
Narrow escutcheon
 Finish: SSS



222.0301.630
Cylinder Pull
 Size: 43 x 68mm
 Finish: SSS




223.0901.630
Flush Pull
 Size: 120 x 40mm
 Finish: SSS




224.0003.630
Flush Pull Square
 Size: 70 x 70mm
 Finish: SSS

Other Finishes:

AB (Antique Brass), PSS (Polishes Stainless Steel), PB (Polished Brass), CP (Chrome Plate)

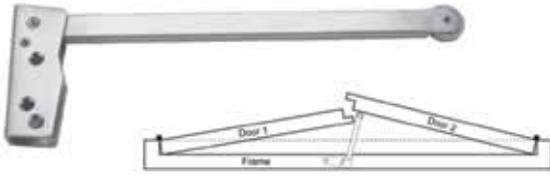

225.0280.630
Door Selector
Finish: SSS

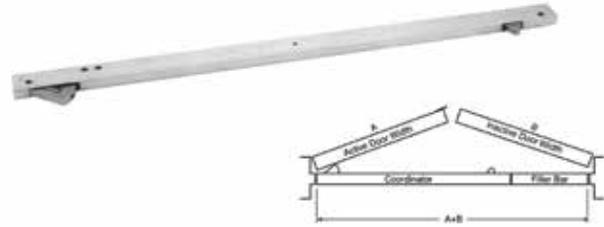

226.4250.630
Door Selector
Sizes: 32", 42", 52" And 60"
Finish: SSS



250.822.630
Unisex symbol
Size: 76mm dia
Finish: SSS



250.823.630
Sex symbol - Male
Size: 76mm dia
Finish: SSS



250.824.630
Sex symbol - Female
Size: 76mm dia
Finish: SSS




250.825.630
Sex symbol - Disabled
Size: 76mm dia
Finish: SSS

Name / Number Plates



251.826.630
Size: 305 x 76 x 1.5mm
Finish: SSS



251.827.630
Size: 120 x 60 x 1.5mm
Finish: SSS



251.828.630
Size: 120 x 60 x 1.5mm
Finish: SSS



251.829.630
Size: 120 x 75 x 1.5mm
Finish: SSS



251.830.630
Finish: SSS



251.831.630
Finish: SSS



251.832.630
Finish: SSS

Other Finishes:

AB (Antique Brass), PSS (Polishes Stainless Steel), PB (Polished Brass), CP (Chrome Plate)




IGH.433.SS




CF 714




- High Performance Hinge with Ball Bearing to carry heavy load. (Anti Corrosive)
- Certified to BSEN 1935 Grade 13
- CE Marked
- CERTIFIRE CF 714
- Suitable for Fire Rated Doors.
- Effective Door weight: 120 KG (Based on 3 Hinges per door)
- Supplied with 8 Screws (Specify door type - Steel / Timber)
- Size: 102mm x 76mm x 3mm
- Finish: Satin Stainless Steel - SSS 304 Grade



433.BB.630
Size: 102x76x3mm
Finish: SSS



443.BB.630
Size: 102x102x3mm
Finish: SSS




45434.BB.630
Size: 114x102x3.4mm
Finish: SSS



SOSS CONCEALED HINGE

218.117.630
218.117.630.FR Fire Rated
Size : 117.48 x 28.58mm
Finish: SSS



Spring Hinge

443.394.630.SA
Size: 4 x 4 x 3mm
Finish: SSS



Double Action Spring Hinge

543.103.630 - 125mm
544.103.630 - 150mm
Finish: SSS

BRITON 5400 Series Lockcase



Briton 5410 Cylinder Deadlock

Application: The deadbolt can be thrown and withdrawn from one side or from both as required depending on the cylinder selected.
Conforms to: EN 12209
Classification: 2H810F3BC00



Briton 5420 Cylinder Sashlock

Application: The lock can be operated by lever handles to withdraw the latchbolt. The deadbolt can be thrown and withdrawn from one or both sides as required depending on the cylinder selected. The cylinder to latch function will operate both deadbolt and latch.
Conforms to: EN 12209
Classification: 2H810F3BC20



Briton 5430 Bathroom lock

Application: From both sides the lock can be operated by lever handle to withdraw the latchbolt. The 10mm throw deadbolt is operated from inside by a single turn of a thumbturn. The outside of the door can be fitted with an indicator and emergency release and operates in conjunction with the thumbturn via an 8mm spindle.
Conforms to: EN 12209
Classification: 2H810F-B020



Briton 5440 Latch

Application: From both sides the lock can be operated by lever handle to withdraw the latchbolt at all times.
Conforms to: EN 12209
Classification: 2H810F-B020

Emergency Exit Panic Hardware

Products to EN 1125

“The most important thing you must consider when specifying panic exit hardware is who might be in the building in the event of an emergency.”

The following range consists of a vertical panic bolt, rim panic latch and a mortice nightlatch operator. Each product is operated by a horizontal push bar which, when pushed in a downward arc, withdraws either the bolts or the latch, releasing the door for immediate escape in the event of an emergency.

Where personnel have not been trained in the location and operation of the buildings exit devices or members of the public have access, exit devices conforming to EN 1125 must be specified and installed.



Briton 376 vertical panic bolt

- Two point locking for extra security
- Anti-thrust device, prevents unauthorised retraction of the latch bolt
- Suitable for use on single and double door applications
- Self-handed - will suit both left and right handed doors
- Suitable for doors up to 2500mm high x 1300mm wide (extension rods are required to achieve maximum sizes)
- Optional models available include pullman latches, alarmed and manually dogged (hold open) functions
- Adjustable top and bottom shoots
- Supplied with an easy clean socket
- Metal door variant with metal door strikes and machine screws, order 376M



Briton 378 reversible rim panic latch

- Suitable for use on single doors and the first opening leaf of double doors with rebated meeting stiles
- Supplied in left or right hand, but can be reversed on site
- Suitable for doors up to 1300mm wide
- Double door strike available for double rebated door applications
- Available with manual dogging (hold open)
- Can be used with rim cylinder fitted to the outside of the door
- Metal door variant with metal door strikes and machine screws, order 378M



Briton 379.N mortice panic nightlatch

- Suitable for use on single and the first opening leaf of double door applications
- Supplied right hand, but can be reversed on site
- Suitable for doors up to 1300mm wide
- Supplied with dual profile cylinder mortice nightlatch, accepts both euro and oval profile cylinders (cylinder not supplied)
- Anti-thrust device, prevents unauthorised retraction of the latch bolt
- Optional models include alarmed and manually dogged (hold open) functions
- Metal door variant with metal door strikes and machine screws, order 379M.N



**Briton 1413 E/LE
External Locking - Lever Variant**

A combination of market trends and the effect of The Disability Discrimination Act (DDA) has resulted in an increase in market demand for lever operation.



**Briton 1438
Push Pad Rim Latch**
Pad operated Rim Latch
Easy Reversible
Security Grade 3 : 2,000 Newtons



**Briton 378.DDS
Double Door Strike**



Briton Stainless Steel Hinges

Y4801.SS
Ball Bearing Butt Hinges, Fire Rated

Size: 102 x 76 x 3mm
EN 1935 Grade 13 Standard
Classification Code:

4	7	6	1	1	4	0	1	3
---	---	---	---	---	---	---	---	---

 CE



CE Certified
Available in Grade 304 and 316 Stainless Steel



Suitable for Wooden / Steel doors
Tested for EN 1935:2002 Grade 13, CE Marked
Maximum door weight : 120 kgs (3 Hinges per door)

Briton Door Closers



BRITON 121

The Briton 121 compact overhead door closer is suitable for the most popular door sizes. It has all the characteristics of performance, durability, functionality and quality that specifiers have come to expect from a Briton door control.

Successfully tested to recommendations of EN1154 & EN1634

Fixed power size 2 -4, Supplied with fixings for regular and transom mounting only



BRITON 1110

The Briton 1100 series trimplate style closer is designed to provide a mid-range product with choice of the most popular options, in a concise, cost-effective package.

Successfully tested to recommendations of EN1154 & EN1634

Power size: 2 - 4

CE Certified, Certifire Approved CF 388
Suitable for fire doors – tested to 2 hours



BRITON 2004 E

Successfully tested to recommendations of EN1154 & EN1634
Power size: 4
CE Certified, Certifire Approved CF 111
Suitable for fire doors – tested to 2 hours



BRITON 2130

Successfully tested to recommendations of EN1154 & EN1634
Wind through adjustable for power size 2-6 making it suitable for most door applications including doors up to 1400mm wide and 120kg in weight
CE Certified, Certifire Approved CF 111
Suitable for fire doors – tested to 2 hours



Door Closers



203.2001.770

Variable closing force, Size: 3,4
 Standard Door 65 to 80 kg
 Body dimension: 188 x 42 x 63 mm
 Standard Arm
 Angle of opening: 180 Degree
 Rack and pinion
 Power shoe arm bracket
 Latching speed adjustable
 Option for full Cover
 Sweep Speed adjustable
 Warranty: 5 Years
 Finish: Silver
 Brand: Euro Protec AK



203.730.005

Variable closing force, Size: 4 - 6
 Standard / Heavy Door upto 120 kg
 Body dimension: 246 x 62 x 45 mm
 Standard Arm, Rack and pinion
 Angle of opening: 180 Degree
 Power shoe arm bracket
 Latching speed adjustable
 Option for Hold Open Arm
 Sweep Speed adjustable
 EN 1154 483113
 Warrington 1121-CPD-AD0093
 Warranty: 10 Years
 Finish: Silver
 Brand: DORINT



Option for SS Door Closer Cover



203.385.005

Variable closing force, Size: 3 - 5
 Standard / Heavy Door upto 120 kg
 Body dimension: 239 x 61 x 37 mm
 Track Arm
 Hold open
 Rack and pinion
 Angle of opening: 120 Degree
 Power adjustable by spring
 Latching speed adjustable
 Sweep Speed adjustable
 Back Check
 EN 4852113
 Warrington Report # 144029
 Warranty: 10 Years
 Finish: Satin Nickel
 Brand: DORINT



FLOOR SPRING



204.840.630
FLOOR SPRING

Finish: SSS

Door size: 950mm - 105 kg = 204.843.630
 Door size: 1100mm - 150 kg = 204.844.630
 Door size: 1250mm - 200 kg = 204.845.630




204.840.630.DA
Double Action Accessories




204.840.630.SA
Single Action Accessories



SLIDING DOOR SYSTEM

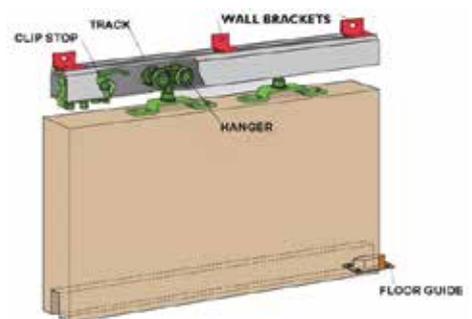

205.841.626





6000 SERIES TOUCH BAR, UL Listed
6080F / 6090F / 6050

Product Specification:
Heavy Duty Commercial Grade 1 Rim Exit Devices

Conform to ANSI/ BHMA A156.3 Grade 1 UL and CUL listed
UL Listed for 3 hours fire rated exit devices

Required Door thickness: 44mm
Suitable for Door Width: 36"
Latch Bolt Stainless steel 19mm throw
Dead latch bolt Stainless steel 16mm
Reversible Trim
Device Length: 32" for 36" size door
Non - handed

6000 SERIES VERTICAL ROD EXIT DEVICE, UL Listed
6080V / 6090V

Product Specification:
Heavy Duty Commercial Grade 1 Rim Exit Devices

Conform to ANSI/ BHMA A156.3 Grade 1 UL and CUL listed
UL Listed for 3 hours fire rated exit devices

Required Door thickness: 44mm
Suitable for Door Width: 36"
Reversible Trim
Non-handed
Device Length: 834mm
Top Rod 1100mm, Bottom rod 960mm
Vertical rod: 13mm round tubing



External Trim



LHL550
OUTSIDE TRIM

Size: 95.25 x 120 mm



ESC550PF
OUTSIDE TRIM with Cylinder

Size: 63.5 x 232 mm



ASSA ABLOY Architectural hardware for Doors

ABLOY products are the culmination of continuous R & D, testing and our ability to understand and solve customers' security related issues. Our continuing mission is to help people feel safer and more secure, without compromising the freedom in their daily lives.

ABLOY products are chosen worldwide for sensitive applications in the most exposed locations continually withstanding the harshest of elements in the most extreme of climates both on land and at sea. They are used extensively within high risk, high value markets as well as infrastructure, government and defence end users who demand the ultimate in high security.

ABLOY lock cases are constructed to meet the high requirements set by local authorities regarding forced entry and fire-ratings.

The exterior and interior handle range includes both classical handles and handles suited to modern design. ABLOY door handles are made from brass, stainless steel, aluminium and zinc, depending the usage. ABLOY door handles are available for Scandinavian and Euro profile DIN range.

The most important standards with escape routes are EN179 and EN1125. These strict standards set the base requirements to our product's opening and closing force, corrosion- and wear resistance and fire approval.

The CE marked products are always tested to meet a specific application. The CE marking certifies that the product conforms to this standard to be used in a specific environment, it ensures the safety and durability of the product.

ABLOY INOXI 3-19
Design ABLOY



ABLOY INOXI 3-19s
Design ABLOY



ABLOY INOXI 3-19k
Design ABLOY



ABLOY INOXI 3-19ss
Design ABLOY



INTER GLOBE - Electronic Locking system



2900 CLASSIC Key Card System

Hotek Hospitality Group provides safety- and comfort products for every segment of the hotel industry.

Main technical data

- In accordance with ISO-14443A/B standards.
- Lock without a cable, current using 4 x standard AA batteries incl. low battery voltage alarm.
- Longevity of batteries minimum 2-3 years.
- Emergency cylinder and mechanical key to open the door in case of emergency.
- Electronic mortise, with anti-panic function and dead bolt lock.
- The lock draws the attention of the guest with a subtle alarm if the door is not properly closed.
- Once the lock is bolted on the inside by the guest, it is visible through the red glowing LED (privacy function).
- Optionally available with wall readers for control of electric doors and/or locks.
- Optionally available with intelligent energy control units for switching current in the hotel room.



A traditional hotel room door lock, converted to the lock of the future. That is what the Hotek 2900 CLASSIC RFID is. Quality and safety have been paramount in the development of this robust lock. The Hotek 2900 CLASSIC RFID is thus equipped with a built-in alarm, which is activated when the door is not properly closed. A feeling of safety for your guests and of great convenience to housekeeping.

Electronic Digital Locks



Code: 1313

Code: 1313 K

Code: 1036 K

- CE Marked Mortise Lockcase
- Battery operated
- Pass Code protected (can be changeable)
- Over ride keys
- Low Battery alarm with Red Light Flash indicator
- Finish: SSS, CP, PB

List of Projects

PROJECTS	Location
FGB Arena At Zayed Sports City	Abu Dhabi
EMAL Smelter Complex @ Khalifa Port	Abu Dhabi
AL MASAOOD Village, G+3 Staff Accommodation	Abu Dhabi
Industrial Warehouse for Al Masaood	Abu Dhabi
Hotel Premier Inn, Capital Centre ADNEC	Abu Dhabi
Ministry of Foreign Affairs	Abu Dhabi
HYDRA Villas - 155 Villas - TROJAN - Govt. of Abu Dhabi	Abu Dhabi
SKY TOWER, Al Reem Island	Abu Dhabi
HONDA Showroom	Abu Dhabi
Le Meridien Hotel	Dubai
Al BADIA Villas, Dubai Festival City (DFC)	Dubai
Prayer Hall at Dubai Festival City (DFC)	Dubai
IMPZ - International Media Production Zone - Office Building	Dubai
DEWA - Dubai Electricity & Water Authority, Jebel Ali Main Plant	Dubai
Al Shabab Academic Club	Dubai
Jumeriah English Speaking School @ Arabian Ranches	Dubai
Indoor SOCCER HALL, Al Khawaneej	Dubai
Jumeirah Golf Estate Villas	Dubai
G+9 Residential Apartment (AL JABER BUILDING), Al Barsha	Dubai
ARENCO Tower @ JBR, Sector 03	Dubai
Office Building for Bin Dasmal at Dubai Investment Park	Dubai
Office Building for GLOBAL PIPING	Dubai
RADISSON BLU Hotel at Business Bay	Dubai
EMAAR TOWER, Down Town Development Plot 12 & 13 - TOWER 2	Dubai
Labour Camp of M/s. Techno Steel Contracting	Dubai
Mosque at Al Quoz Industrial Area 4	Dubai
B+G+3P+18 FAIRVIEW RESIDENCY @ Business Bay, Dubai	Dubai
G+3 Residential Apartment at Muhaisna 4	Dubai
DP WORLD - HR Building	Dubai
Industrial Warehouse for CANARA STEEL CO.	Sharjah
LEXUS Car Showroom	Sharjah
G+4 Residential Building, Rolla	Sharjah
Military Project (KBR)	Bahrain
Pearl I & II - Pet Complex Octal, Salalah	OMAN
Villas for Mohd. Ibrahim Abdulla Al Fassi	OMAN
HAMAD MEDICAL CITY	QATAR

NORMBAU



ASSA ABLOY



ASSA ABLOY



ASSA ABLOY



LOCKS



Frascio



LCN



IVES

HENDERSON



VON DUPRIN

INTER GLOBE

IGA GENERAL TRADING LLC

Office:

Warehouse No.11

Sharjah Industrial Area 18

Sharjah, UAE.

Tel: +971 6 5757 420

Fax: +971 6 5757 141

E-mail: iggtmong@eim.ae